




LC Duplex Uniboot Connector

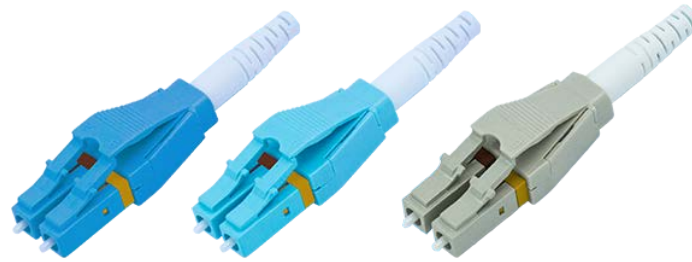

APPLICATIONS


- Gigabit Ethernet
- Video
- Multimedia
- Active device termination
- Premise installations
- Telecommunication networks



FEATURES

- Have two dismount gap, easy to dismount
- Streamline design, good aesthetic
- Uniboot connector cable management
- Switchable Connector to change polarity
- MINI Boot & Flex angle boot available
- Right Angle Clip well for panel management

SPECIFICATIONS

	Single mode	Multimode
Insertion Loss	≤0.30dB	≤0.30dB
Return Loss	≥50 dB (PC) ≥60 dB (APC)	
Durability	<0.20 dB typical change, 1000 matings	
Operating Temperature	-40 to + 85°C	-40 to + 85°C
Ferrule Hole Sizes	125.0+1/-0μm, Concentricity: ≤1.0μm	126μm, Concentricity: ≤3.0μm
	125.5+1/-0μm, Concentricity: ≤1.0μm	127μm, Concentricity: ≤3.0μm
	126.0+1/-0μm, Concentricity: ≤1.0μm	128μm, Concentricity: ≤3.0μm

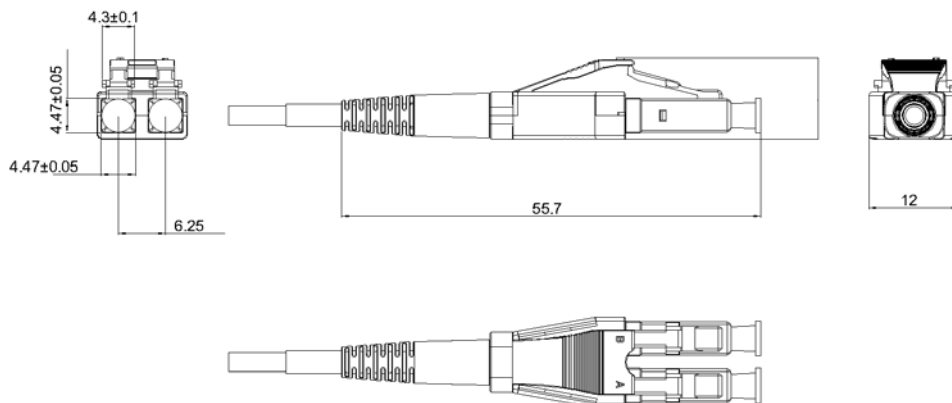

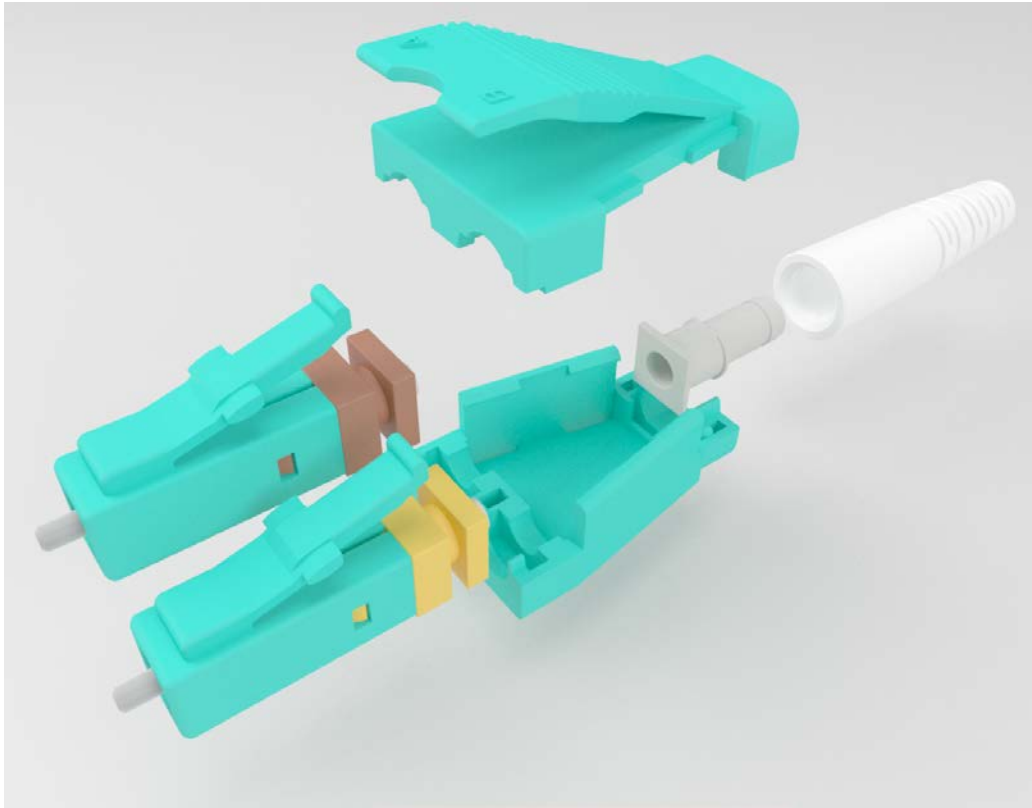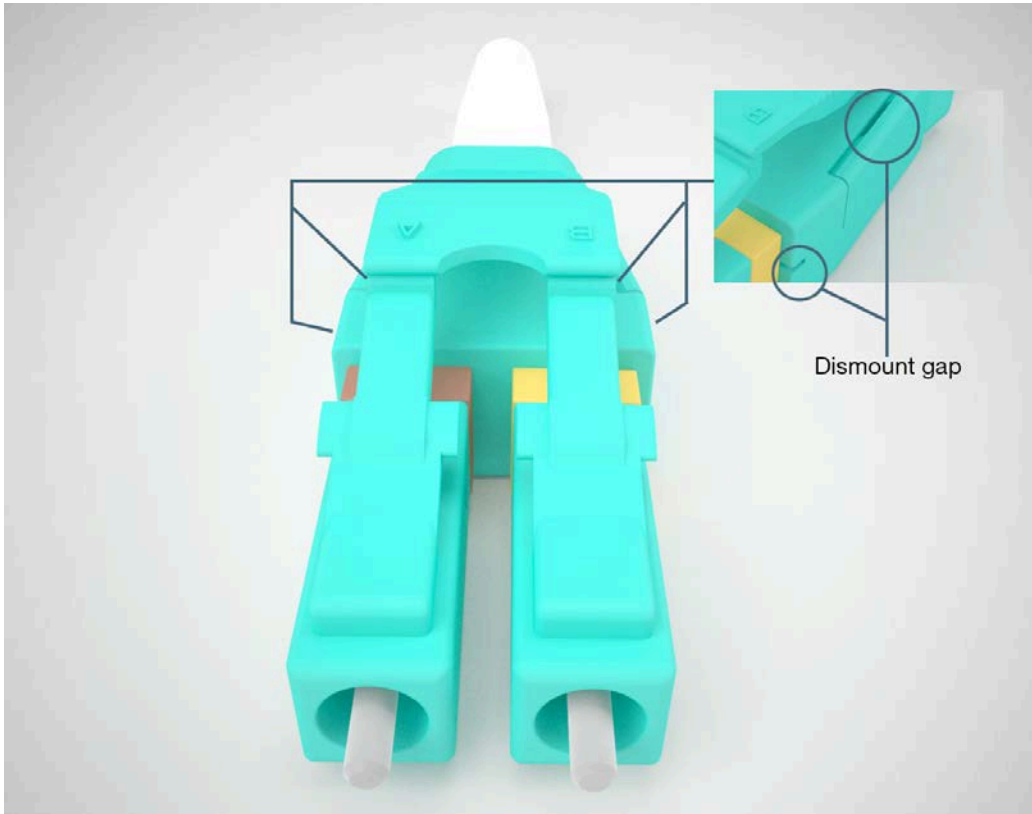

The Global Solution in Active and Passive Fiber Optic Components