



FIS LC QUAD MATING SLEEVES

APPLICATIONS

- Telecommunications
- Local area network
- CATV Distribution Networks

FEATURES

- SC Duplex Footprint
- Panel Mount Design
- Available in Singlemode or Multimode versions

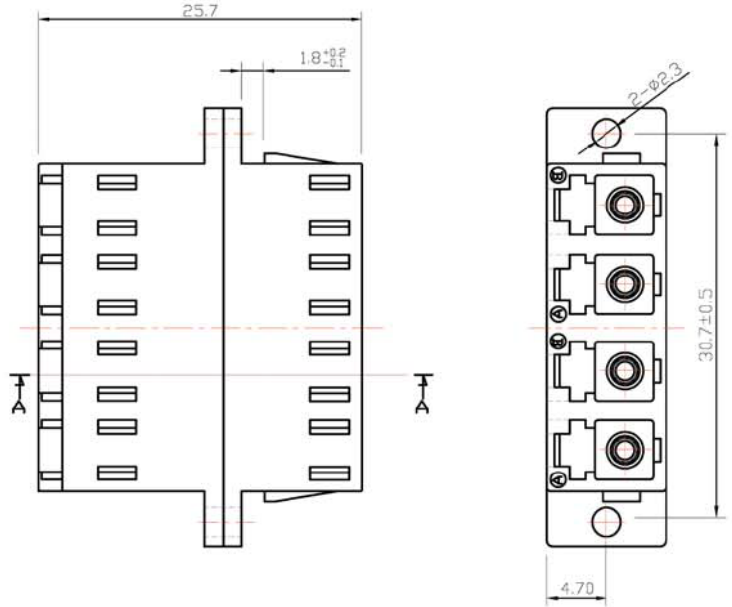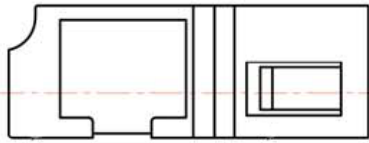

SPECIFICATIONS

Operating Temperature (°C)	-40°C to +70°C
Excess Loss	.1 dB or less Singlemode 15 dB or less Multimode

MATERIALS

Split Sleeve	Singlemode Multimode	Ceramic Bronze
Body (ABS Plastic)		
F1-8045	Blue	Singlemode
F1-8040	Beige	Multimode
F1-8041	Aqua	10 Gig Multimode