

FIS SMA 905 & 906 CONNECTORS

Features

- 3.0mm Cables Supported
- Unique Connector Design for Easy Termination
- Stainless Alloy Ferrule capable of being drilled up to 1550um

Applications

- Laboratory
- Local Area Network




SPECIFICATIONS

Fiber Hole Diameter	126um +/-0um
Operating Temperature	-20° C to +70° C
Back Reflection	-20 dB Typical
Insertion Loss	<= 1.0 dB
Cable Retention (3mm)	> 15 lbs

Materials

Ferrule	Stainless Alloy (Nickel Silver)
Body	Nickel Plated Brass
Crimp Sleeve	Nickel Plated Brass
Boot	Thermoplastic Rubber

TECHNICAL DRAWING

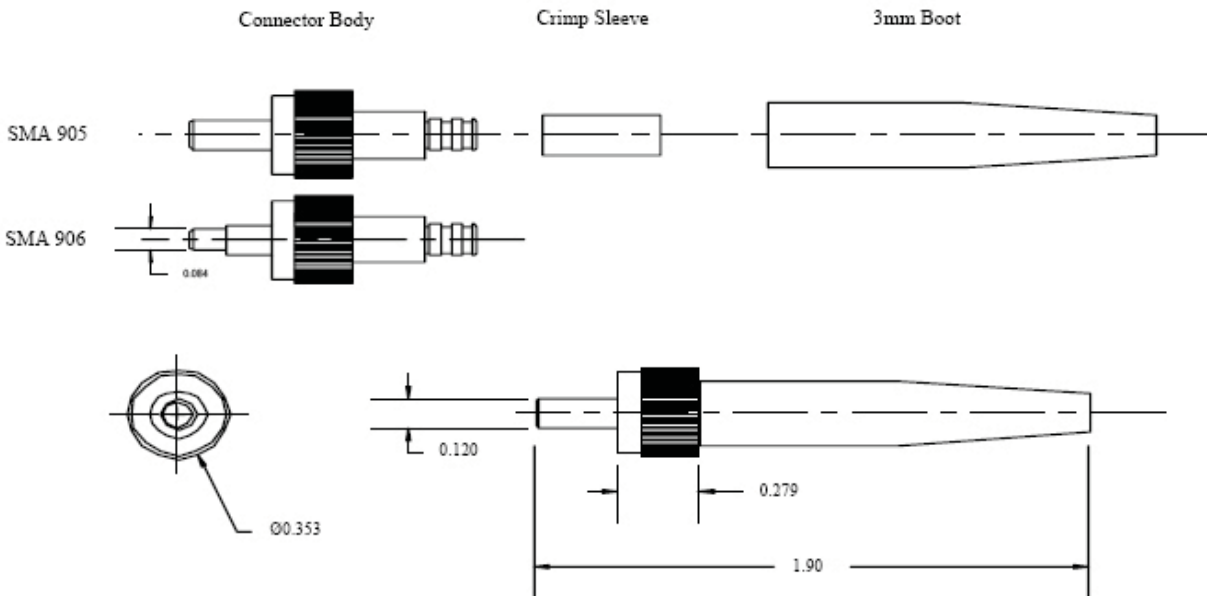

1.800.5000.FIS

161 Clear Road • Oriskany, NY 13424
 Tel: 315.736.2206 • Fax: 315.736.2285
 info@fiberinstrumentsales.com
 www.fiberinstrumentsales.com

