


FIS 900µm CHEETAH SPLICE-ON CONNECTOR™

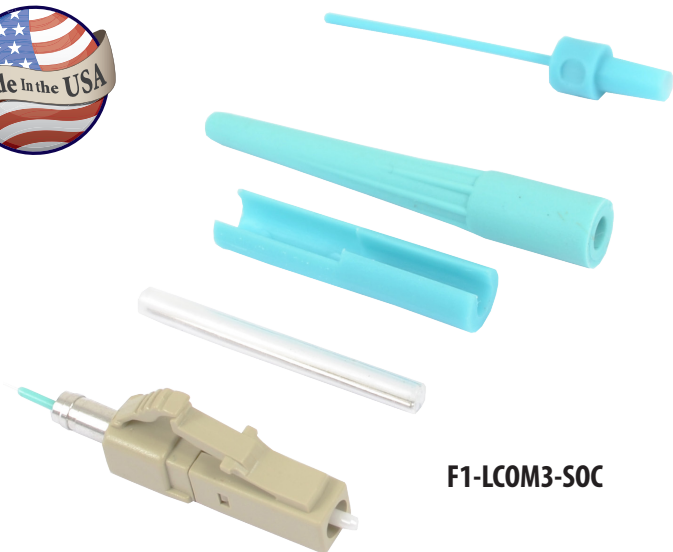

F1-LCOM3-SOC

FEATURES

- Return loss: APC >65dB, UPC >55dB and MM 35dB (typical)
- 19 styles available: SM, MM, 10Gig
- Universal holders work with AFL, Sumitomo, and Fitel fusion splicers
- 900um boot protects splice for easy cable management
- Includes color coded 900um buffer, boot, cleave protector and extended dust cap for easy fiber identification

All ferrules are made of zirconia. Fusion splice sleeve and connector boot are included with each SOC.

Note: The Cheetah Splice-On Connector requires the use of a fusion splicer with removeable fiber holders.

Using a factory terminated, pre-polished connector the Cheetah Splice-On Connector provides a connection meeting or exceeding industry standards for loss and back reflection. The Cheetah Splice-On Connector is provided with a factory cleaved 900um fiber stub to ensure easy of use and optimal performance. The unique 900um boot allows the entire splice to be concealed and protected, allowing for a simpler cable management system within the rack or enclosure. To terminate, just remove the cleave protector, place the connector into the holder, place the holder in the splicer, preload the field fiber and the Cheetah is ready to be terminated. Product manufactured in the U.S.A.

SPECIFICATIONS

Connector Type	SM/APC	SM/UPC	MM/62.5um	MM/50um	MM/OM3	MM/OM4
Type of Fiber	SMF® Ultra		InfiniCor® 300	ClearCurve® OM2-4		
Insertion Loss (max)	0.3dB (0.15dB typical)		0.4dB (0.25dB typical)			
Optical Return Loss	>65dB	>55dB	35dB (typical)			
Ferrule Type	All Zirconia Pre-Polished Ferrules					
Color Code	Green	White	Beige	Black	Aqua	Magenta
Operating Temperature	-40 to +85 degrees C					
Industry Standards	RoHS Compliant, Telcordia GR-326-CORE Compliant					
Cable Retention	2.5 lbs.					

ORDERING INFORMATION

F1-LCAPC-SOC-X	LC/APC Singlemode, Green 900µm Boot	F1-SCOM3-SOC-X	SC/PC 50µm Multimode (OM3), Aqua 900µm Boot
F1-LCUPC-SOC-X	LC/UPC Singlemode, White 900µm Boot	F1-SCOM4-SOC-X	SC/PC 50µm Multimode (OM4), Magenta 900µm Boot
F1-LC62-SOC-X	LC/PC 62.5µm Multimode (OM1), Beige 900µm Boot	F1-STUPC-SOC-X	ST/UPC Singlemode, White 900µm Boot
F1-LC50-SOC-X	LC/PC 50µm Multimode (OM2), Black 900µm Boot	F1-ST62-SOC-X	ST/PC 62.5µm Multimode (OM1), Beige 900µm Boot
F1-LCOM3-SOC-X	LC/PC 50µm Multimode (OM3), Aqua 900µm Boot	F1-ST50-SOC-X	ST/PC 50µm Multimode (OM2), Black 900µm Boot
F1-LCOM4-SOC-X	LC/PC 50µm Multimode (OM4), Magenta 900µm Boot	F1-STOM3-SOC-X	ST/PC 50µm Multimode (OM3), Aqua 900µm Boot
F1-LCOM4-SOCAQ-X	LC/PC 50µm Multimode (OM4), Aqua 900µm Boot	F1-FCAPC-SOC-X	FC/APC Singlemode, Green 900µm Boot
F1-SCAPC-SOC-X	SC/APC Singlemode, Green 900µm Boot	F1-FCUPC-SOC-X	FC/UPC Singlemode, White 900µm Boot
F1-SCUPC-SOC-X	SC/UPC Singlemode, White 900µm Boot	F1-FC62-SOC-X	FC/PC 62.5µm Multimode (OM1), Beige 900µm Boot
F1-SC62-SOC-X	SC/PC 62.5µm Multimode (OM1), Beige 900µm Boot	F1-FC50-SOC-X	FC/PC 50µm Multimode (OM2), Black 900µm Boot
F1-SC50-SOC-X	SC/PC 50µm Multimode (OM2), Black 900µm Boot	F1-FCOM3-SOC-X	FC/PC 50µm Multimode (OM3), Aqua 900µm Boot

***When ordering replace the "X" to specify 10 = 10pack, 100 = 100pack.**

CHEETAH SOC™ COMPATIBLE CHART

Manufacturer	Splicer Model	SOC Cordage Size Compatability	Metal Holder Compatability	Metal Holder Part Number	Universal Holder Compatability
FIS	F1-CA3	900µm & 3.0mm	All Versions	F1SOCCA3	All Versions
AFL/Fujikura	12S	900µm & 3.0mm	All Versions	F1SOCMTLA	All Versions
	19S				N/A
	60S/70S				
	62S				
21S/22S					
Furukawa/Fitel	S122 (A/C/M)	900µm & 3.0mm	All Versions	F1SOCMTLF	All Versions
	S121 (A/M)				
	S123 (C/M)				
	S153				
	S178A				
	Ninja				
Sumitomo	Type-25e (U/S/M)	900µm only	All Versions	F1SOCMTLS	All Versions
	Quantum (Q101-CA)				N/A
Greenlee	910FS	900µm only	SC & LC Only	GREENSOCHLDR	N/A



Metal Injection-Molded SOC Holder

Dimensions: L x W x H
1.466" x 0.633" x 0.248"
37.2mm x 16.1mm x 6.3mm



ABS Plastic Injection-Molded SOC Holder

Dimensions: L x W x H
1.466" x 0.633" x 0.248"
37.2mm x 16.1mm x 6.3mm